


MonarchSP click-down has an acoustic silent pad insulation layer, most suitable for residential and intermediate commercial areas.

This range uses our IXPE pad that offers a quiet, solid step underfoot. The unique micro closed-cell technology offers a waterproof backing that is mold and mildew resistant.

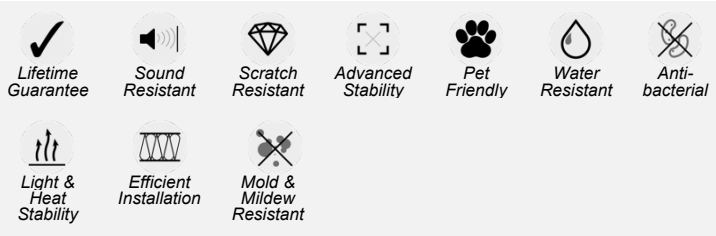

Plank: 1220mm x 181mm
Tile: 940mm x 465mm

5 mm total gauge
0.55 mm wear layer
Adore lock system
1 mm IXPE acoustic insulation layer
4 sided micro bevel
PU-coating
Bevelled edge
100% recyclable

PER CARTON 12 Planks 2.65m²
7 Tiles 3.06m²

	STANDARD	MONARCH ^{SP}	
SIZE		1220mmx181mm	940mmx465mm
THICKNESS	ISO24346	5.0mm	5.0mm
WEAR LAYER	ISO24340	0.55mm	0.55mm
QUANTITY PER CARTON		12 pcs	7 pcs
COVER AREA PER CARTON		2.65m ²	3.06m ²
GUARANTEE	Light industrial Commercial Domestic	15 years 15 years Lifetime Warranty	15 years 15 years Lifetime Warranty
STANDARDS	ISO/DIS19322.2:2016 EN649	Heterogeneous PVC	Heterogeneous PVC
CLASSIFICATION	ISO 10874 Commercial ISO 10874 Domestic EN 685- Light industrial EN 685- Commercial EN 685- Domestic	33: Heavy Commercial 23: Domestic heavy	33: Heavy Commercial 23: Domestic heavy
INFLAMMABILITY	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _f -s1	B _f -s1
STAINING RESISTANCE	EN ISO 26987:2012	Class 0	Class 0
COLOUR FASTNESS	EN ISO 105-B02	Grade 6	Grade 6
FUNGI RESISTANCE	ISO846	Growth intensity 0	Growth intensity 0
DIMENSIONAL STABILITY	EN ISO 23999	≤0.15%	≤0.15%
ACOUSTIC INSULATION	EN ISO 10140-3 ISO717-2	ΔLw 20DB	ΔLw 20DB
RESIDUAL INDENTATION	EN 433	< 0.1mm	< 0.1mm
CASTOR CHAIR	ISO 4918 EN 425:2002	Pass	Pass
FORMALDEHYDE EMISSION	EN14041:2004	Class E1	Class E1
SLIP RESISTANCE	EN 13893 DIN 51130	DS R10	DS R10
ELECTROSTATIC BEHAVIOUR	EN1815	Pass	Pass
REACH	EC No 1907/2006	Pass	Pass
VOC EMISSION	France VOC regulation	A+	A+

For more information and warranties on **MonarchSP** and our other ranges, please consult our website at adorefloors.eu.

