


Sovereign is great for residential and commercial use.

This range uses our IXPE pad that offers a quiet, solid step underfoot. The unique micro closed-cell technology offers a waterproof backing that is mold and mildew resistant.

NEW Sovereign now available in Herringbone.

Suitable for residential and light commercial use.

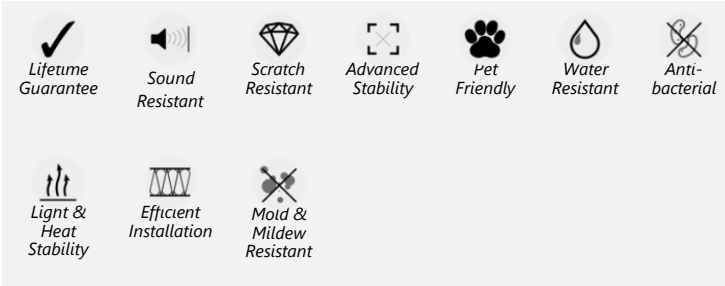

Plank: 1220mm x 181mm
 Herringbone: 635mm x 127mm
 Tile: 940mm x 465 mm,
 610mm x 465mm

6 mm total gauge
 0.7 mm wear layer
 0.55mm Herringbone wear layer
 Adore lock system
 1.5 mm IXPE acoustic insulation layer
 1mm Herringbone IXPE acoustic insulation layer
 4 sided micro bevel
 PU-coating
 Bevelled edge
 100% recyclable

PER CARTON 10 Planks 2.21m²
 10 Herringbone Planks 0.81m²
 6 Tiles 2.62m²
 10 Tiles 2.84m²

	STANDARD	SOVEREIGN			
SIZE		1220mmx181mm	940mmx465mm	610mmx465mm	635mmx127mm
THICKNESS	ISO24346	6.0mm	6.0mm	6.0mm	6.0mm
WEAR LAYER	ISO24340	0.7mm	0.7mm	0.7mm	0.55mm
QUANTITY PER CARTON		10 pcs	6 pcs	10 pcs	10 pcs
COVER AREA PER CARTON		2.21m ²	2.62m ²	2.84m ²	0.81m ²
GUARANTEE	Light industrial Commercial Domestic	25 years 25 years Lifetime Warranty	25 years 25 years Lifetime Warranty	25 years 25 years Lifetime Warranty	15 years 15 years Lifetime Warranty
STANDARDS	ISO/DIS19322.2:2016 EN649	Heterogeneous PVC	Heterogeneous PVC	Heterogeneous PVC	Heterogeneous PVC
CLASSIFICATION	ISO 10874 Commercial ISO 10874 Domestic EN 685- Light industrial EN 685- Commercial EN 685- Domestic	41: Light industrial 33: Heavy Commercial 23: Domestic heavy	41: Light industrial 33: Heavy Commercial 23: Domestic heavy	41: Light industrial 33: Heavy Commercial 23: Domestic heavy	41: Light industrial 23: Domestic heavy
INFLAMMABILITY	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1
STAINING RESISTANCE	EN ISO 26987:2012	Class 0	Class 0	Class 0	Class 0
COLOUR FASTNESS	EN ISO 105-B02	Grade 6	Grade 6	Grade 6	Grade 6
FUNGI RESISTANCE	ISO846	Growth intensity 0	Growth intensity 0	Growth intensity 0	Growth intensity 0
DIMENSIONAL STABILITY	EN ISO 23999	≤0.15%	≤0.15%	≤0.15%	≤0.15%
ACOUSTIC INSULATION	EN ISO 10140-3 ISO717-2	ΔLw 22DB	ΔLw 22DB	ΔLw 22DB	ΔLw 20DB
RESIDUAL INDENTATION	EN 433	< 0.1mm	< 0.1mm	< 0.1mm	< 0.1mm
CASTOR CHAIR	ISO 4918 EN 425:2002	Pass	Pass	Pass	Pass
FORMALDEHYDE EMISSION	EN14041:2004	Class E1	Class E1	Class E1	Class E1
SLIP RESISTANCE	EN 13893 DIN 51130	DS R10	DS R10	DS R10	DS R10
ELECTROSTATIC BEHAVIOUR	EN1815	Pass	Pass	Pass	Pass
REACH	EC No 1907/2006	Pass	Pass	Pass	Pass
VOC EMISSION	France VOC regulation	A+	A+	A+	A+

For more information and warranties on **Sovereign** and our other ranges, please consult our website at adorefloors.eu.

